




ALLIED
MOULDED
PRODUCTS, Inc.

419-636-4217
222 N. Union St.
Bryan, OH 43506

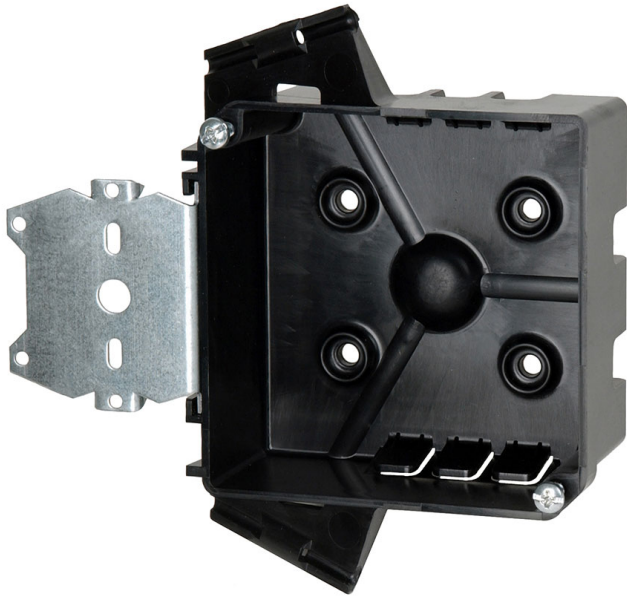

PJ-20H

4 square inch electrical junction box for use with nonmetallic sheathed cable

Closure Type:

Mounting Description: Stud mount hanger bracket offset for flush mount plaster ring

Box Type: Wall - Junction

Box Features: "HL" hanger

Installation Type: New Work

Height: 4 in

Width: 4 in

Depth: 1-5/8 in

Volume: 20.5 cu in

Product Info

Brand: flexBOX

UPC: 85339990000

UNSPSC: 39121332

Carton Quantity: 48

Carton Weight: 15 lbs

Country of Origin: United States of America

Color: Black

Fire Classification: Fire Test of Building Construction Materials ANSI / UL 263: [File No. CEYY.R9379](#) (Category / File No.) *Note: Products must also be certified to: ANSI / UL 514C Fire Resistance Classification in Wall Assemblies 2-Hours or less* Shall be separated by a horizontal distance of not less than 24 inches *Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

Patents: U.S. Patent No. 6,365,831 B1

Material: Polyvinyl Chloride

Additional Materials: Galvanized steel brackets and plated carbon steel fasteners, Plated carbon steel fasteners

Features:

Machine tapped cover screw holes, cover screws included

Application:

In the wall junction box with optional single and two gang plaster ring covers for junction box capacity and device applications - 2 HR fire resistive walls

Standards:

ANSI / UL 514C: [File No. E30594](#)

