




**ALLIED
MOULDED
PRODUCTS, Inc.**

**419-636-4217
222 N. Union St.
Bryan, OH 43506**

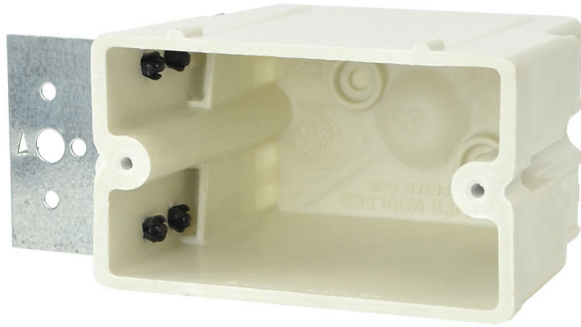

1098-Z4H

Single gang electrical box for use with nonmetallic sheathed cable

Closure Type:

Mounting Description: Stud mount-horizontal "Z" hanger bracket with 1/2" offset

Box Type: Wall - Switch/Receptacle

Box Features: "Z" hanger(s)

Installation Type: New Work

Height: 3-13/16 in

Width: 2-1/4 in

Depth: 3-1/4 in

Volume: 20.5 cu in

Number of Gangs: 1

Product Info

Brand: fiberglassBOX

UPC: 85339250258

UNSPSC: 39121308

Carton Quantity: 50

Carton Weight: 20 lbs

Country of Origin: United States of America

Color: Off white

Fire Classification: Fire Test of Building Construction Materials ANSI / UL 263: [File No. CEYY.R9379](#) (Category / File No.) Note: Products must also be certified to: ANSI / UL 514C **Fire Resistance Classification in Wall Assemblies 2-Hours or less** Shall be separated by a horizontal distance of not less than 3 inches **Fire Resistance Classification in Floor-Ceiling Assemblies 2-Hours or Less** Distance between boxes in adjacent cavities may be reduced to 5 ½ inches Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)

Material: Fiberglass reinforced polyester

Additional Materials: Galvanized steel brackets and plated carbon steel fasteners

Features:

Machine tapped device holes, leveling ribs, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures

Application:

New work residential construction stud face mounted 2 HR fire resistive walls & ceilings

Standards:

ANSI / UL 514C: [File No. E30594](#)

