




**ALLIED
MOULDED
PRODUCTS, Inc.**

**419-636-4217
222 N. Union St.
Bryan, OH 43506**

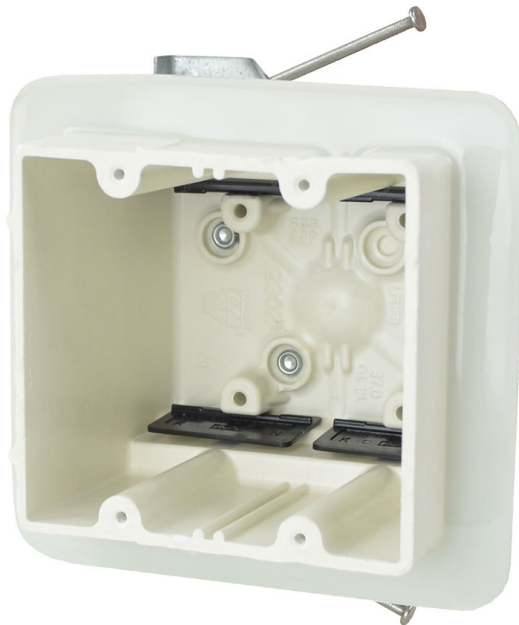

2302-HNKV2

Two gang electrical box for use with nonmetallic sheathed cable

Closure Type:

Mounting Description: Nail-on backside HN hanger bracket for adjusting to additional wall/ceiling substrate

Box Type: Wall - Switch/Receptacle

Box Features: "HN" bracket, Air-sealed flange (energy efficient), Speed "K" nonmetallic clamps

Installation Type: New Work

Height: 3-3/4 in

Width: 4 in

Depth: 3-7/16 in

Volume: 37 cu in

Number of Gangs: 2

Product Info

Brand: Vapor Seal

UPC: 85339927112

UNSPSC: 39121308

Carton Quantity: 6

Carton Weight: 6 lbs

Country of Origin: United States of America

Color: Off white

Fire Classification: Fire Test of Building Construction Materials ANSI / UL 263: [File No. CEYY.R9379](#) (Category / File No.) *Note: Products must also be certified to: ANSI / UL 514C Fire Resistance Classification in Wall Assemblies 2-Hours or less* Shall be separated by a horizontal distance of not less than 3 inches *Note: For more details please refer to the UL fire resistive directory and Allied Moulded's CEYY.9379 (Outlet boxes and fittings classified for fire resistance)*

Patents: U.S. Patent No. 6,908,003 B2

Material: Fiberglass reinforced polyester

Additional Materials: Galvanized steel brackets and plated carbon steel fasteners, Polyvinyl chloride clamps, Polyurethane flange

Features:

Polyurethane flange for double drywall offset, machine tapped device holes, slot provision for low voltage divider, leveling ribs, rigid hard box construction, no distortion with high temperatures, shatter resistant with low temperatures, Speed "K" Clamps factory installed

Application:

New work residential construction 2 HR fire resistive walls - air-sealed electrical boxes for envelop walls in Energy Star homes

Standards:

ANSI / UL 514C: [File No. E30594](#)



NEMA OS 4 - Energy Efficient Air-Sealed Boxes for Electrical Applications

